

Detailed information for: S1-M2-25

This page contains technical data sheet, documents library and links to offering related to this product. If you require any other information, please contact us using form located at the bottom of the page.

S1-M2-25

General Information

Extended Product Type:	S1-M2-25
Product ID:	1SAM201907R1102
EAN:	4013614400810
Catalog Description:	S1-M2-25 Power Infeed Block
Long Description:	S1-M2-25 3-phase power infeed block High, for MS116 / MS132, 25mm ²

Categories

Products » Low Voltage Products and Systems » Control Products » Manual Motor Starters
» Manual Motor Starters Accessories

Ordering

Minimum Order Quantity:	1 piece
Customs Tariff Number:	85369010

Popular Downloads

Data Sheet, Technical Information:	1SBC100192C02--
Instructions and Manuals:	2CDC131011M6802 2CDC131034M6801 2CDC131022M6802
Dimension Diagram:	1SAM200451F0002

Dimensions

Product Net Width:	48 mm
Product Net Height:	53.8 mm
Product Net Depth:	27 mm
Product Net Weight:	0.051 kg

Technical

Terminal Type:	Screw Terminals
Rated Operational Voltage:	690 V AC 250 V DC
Rated Operational Current (I_e):	65 A
Number of Poles:	3
Degree of Protection:	IP20
Connecting Capacity Main Circuit:	Flexible 1x 4 ... 16 mm ² Rigid 1x 4 ... 25 mm ²
Tightening Torque:	Main Circuit 2.5 N·m
Wire Stripping Length:	Main Circuit 10 mm
Recommended Screw Driver:	M3.5 Pozidriv 2
Standards:	IEC/EN 60947-1 IEC/EN 60947-4-1

UL 60947-1
UL 60947-4-1

Product Name: Power Infeed Block
Suitable For: MS116
MS132

Suitable for Product Class: Manual Motor Starter

Accessory Group: Electrical

Accessory Type: 3-Phase Power Infeed Block

Environmental

Ambient Air Temperature: Operation -25 ... +70 °C
Storage -50 ... +80 °C

RoHS Status: Following EU Directive 2011/65/EU

Technical UL/CSA

Maximum Operating Voltage UL/CSA: Main Circuit 600 V AC

Ampere Rating UL/CSA: 65 A

Connecting Capacity Main Circuit UL/CSA: Flexible 1x 12-6 AWG
Stranded 1x 12-4 AWG

Tightening Torque UL/CSA: Main Circuit 22 in·lb

Certificates and Declarations (Document Number)

cUL Certificate: [1SAA963001-1701](#)

Declaration of Conformity - CE: [1SAD938511-0056](#)

GOST Certificate: [1SAA937000-2703](#)

Instructions and Manuals: [2CDC131011M6802](#)
[2CDC131034M6801](#)
[2CDC131022M6802](#)

RoHS Information: [1SAD938511-0056](#)

UL Certificate: [1SAA963001-1602](#)

Container Information

Package Level 1 Width: 80 mm

Package Level 1 Length: 181 mm

Package Level 1 Height: 46 mm

Package Level 1 Gross Weight: 0.548 kg

Weight:

Package Level 1 EAN: 4013614488191

Package Level 1 Units: 10 piece

Classifications

Object Classification Code: X

E-nummer: 3111688

ETIM 4: EC002498 - Accessories for low-voltage switch technology


ETIM 5: EC000275 - Rail terminal bar

ETIM 6: EC000275 - Rail terminal bar

ETIM 7: EC000275 - Rail terminal bar

eClass: 7.0 27400603

UNSPSC: 39121521

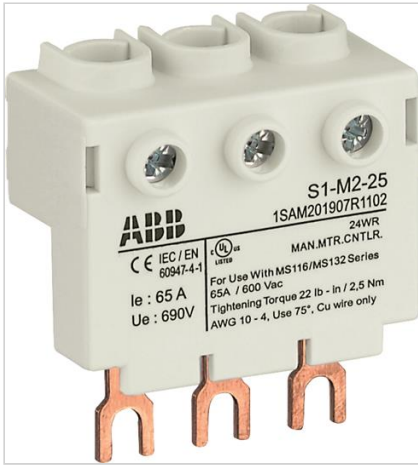

© Copyright 2018 ABB