



NXW1 Consumer Unit (NXW1 Consumer Unit Body) for Outdoor Application


1. General

- 1.1 Electric ratings: up to 63A, 230V, AC50/60Hz;
- 1.2 No. of mounted units: 3, 5;
- 1.3 On-load current A: 63;
- 1.4 Allowable temperature-rise of enclosure: 40k;
- 1.5 Protection degree: IP65;
- 1.6 Standard: IEC/EN 60439-3 (IEC/EN 60670-24)

2. Features

- 2.1 Special designed with excellent enclosure capability; with high protection degree up to IP65, applicable for outdoor mounting.
- 2.2 The interiorly mounted MCBs are all in compliance with relative IEC standards, 9mm modularized electric components are applicable, as well;
- 2.3 On request, various circuit combinations can be assembled; and the mounting capacity of the product units can be taken to 3~ 5units;
- 2.4 Convenient and reliable operation, having exposed handle, and all live parts to be mounted inside the wall box;
- 2.5 The consumer unit is designed with internal terminal blocks for connection of neutral line and protective grounding wire.
- 2.6 The enclosure of the unit is made of plastic material.

3. Overall and mounting dimensions (mm)

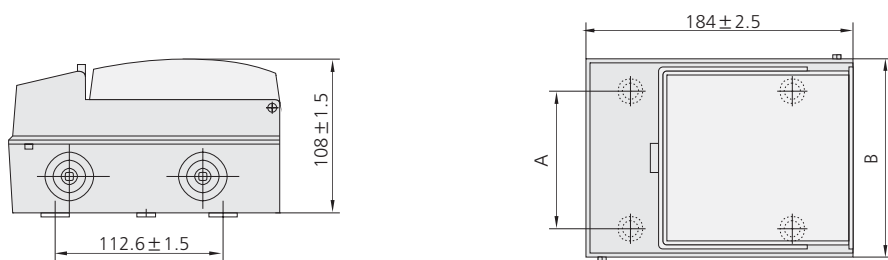

Model	A	B
NXW1-3	66.8±1.5	100±1.5
NXW1-5	102.8±1.5	136±2.5

4. Ordering information

Model	Number of circuits	Order code	
		Standard	RoHS
NXW1	3	151201	971271
NXW1	5	151202	971272